



Настройка Dynamic IPoE на модемах

МТС Интеркросс

Для настройки открыть ваш Интернет браузер и в строке адреса набрать <http://192.168.1.1>
Прописываем в поля Username и Password – **admin** (при условии, что роутер имеет заводские настройки, и его IP не менялся).и нажимаем Login

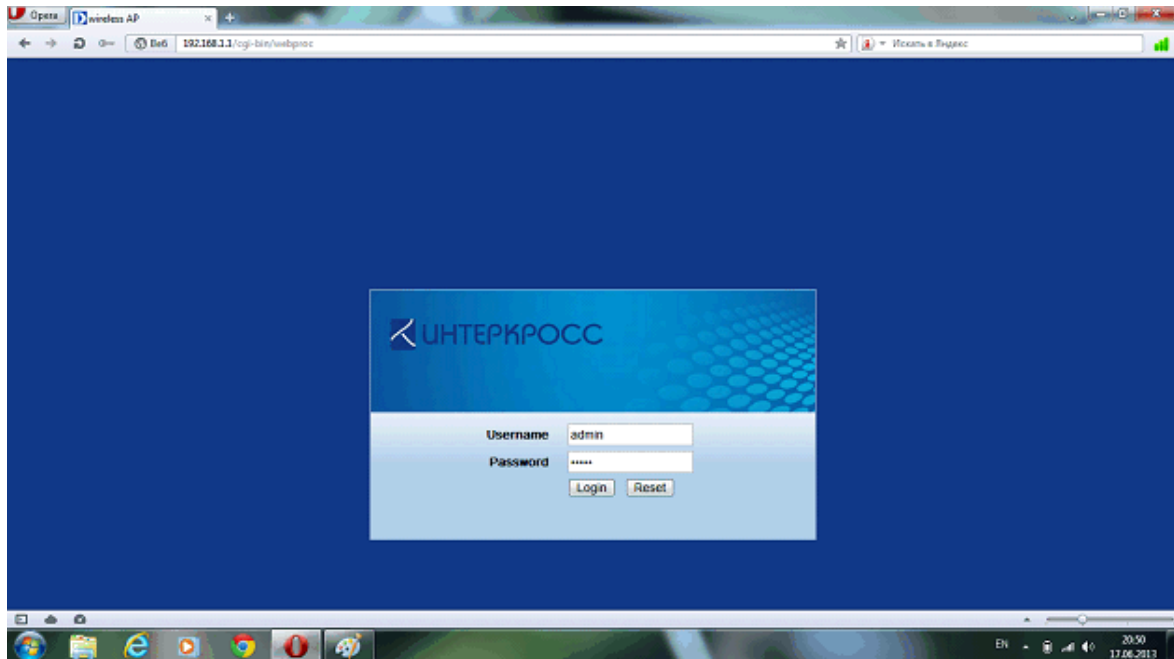

Переходим в раздел **Setup** (1), далее выбираем пункт WAN в меню слева (2). Откроется таблица с подключениями, которые были предварительно настроены заводом-изготовителем. Настройки, сделанные изготовителем ранее, необходимо удалить, нажав на кнопку с изображением корзины (3). После чего нужно создать новое подключение, нажав на кнопку **Add** (4).

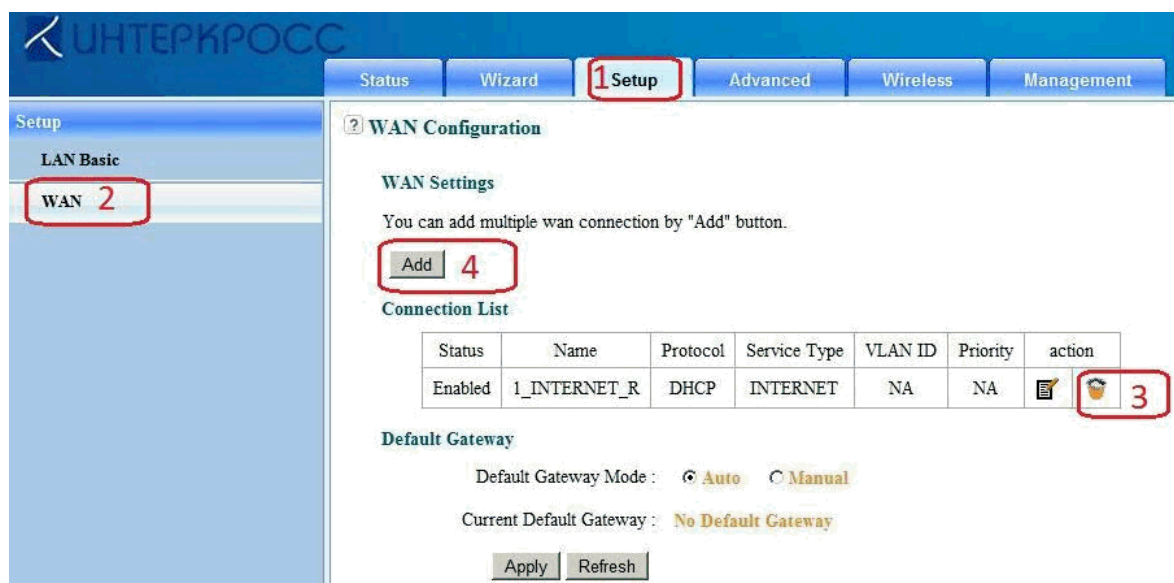

В пункте меню **Connection Type** (1) выберите **DHCP**.
Далее нажмите кнопку **Apply** (2).

Wireless AP

192.168.1.1/cgi-bin/webproc?getpage=html/index.html&errorpage=html/index.html&var:language=en_us&var:menu=setup&var:page=0

Logout

UITEPKPOCC

Status Wizard **Setup** Advanced Wireless Management

Setup

LAN Basic

WAN

WAN Connection

WAN

Enable Wan

Connection Type: **DHCP**

Service Type: INTERNET

DHCP

Hostname:

Vendor Class ID:

MTU: 1500 (616-1500)

802.1X auth

Enable 802.1X auth

User Name: user

Password: ****

NAT

Enable Nat

Nat Type: SymmetricNat

DNS

Domain Name Server Assignment: Auto Manual

Domain Name Server (Primary) IP:

Domain Name Server (Secondary) IP:

Port Binding

LAN Port: LAN1 LAN2 LAN3 LAN4

WLAN Port: SSID1 SSID2 SSID3 SSID4

VLAN

Enable VLAN Tagging

Apply **Cancel**